

POP

SpeedOven - 1 x GN 2/3 capacity





TECHNICAL FEATURES

- · Air impingment+steam technology
- · Plug in electric unit
- Heating of cooking chamber with high performance INCOLOY heathing elements.
- · Tempered glass door
- · Alluminium shelf, with MOCA non-stick coating, for maximum heat diffusion
- 3Lt water tank
- USB connector
- · Removable interior for easy cleaning
- · Doesn't need hood or extraction system

ACCESSORIES INCLUDED

- · Removable non-stick aluminum tray with MOCA non-stick coating
- Oven shovel

TOUCH SCREEN 7":



PRELOADED RECIPES

- 1. TOAST
- 2. CROQUE MADAME
- 3. PIZZA
- 4. SANDWICH
- 5. FOCACCIA
- 6. WRAP

COOKING FEATURES


- · Cook with impingment technology with the addition of steam
- Cook with preloaded or customized recipes
- · Cooking time up to 10 minutes
- Up to 400 cooking cycles with 1 water tank
- Up to 4 sandwiches in 2':30
- OneTouch cooking programs
- · User friendly interface
- Up to 18 customisable programs





POPSpeedOven - 1 x GN 2/3 capacity



C A B	VOL./PESO Vol./Weight	VAC 220/240V-1N 50/60Hz	POTENZA EL. CAMERA Oven cavity el. power	DISTANZA TRA LE TEGLIE Distance between the layers	DIM. CAMERA Cavity net dimension
(A x B x C) mm	m³/kg	kW	kW	mm	mm
431x637x510 1TRAY GN2/3	0,12/45	3,3	3	N/A	360x445x255





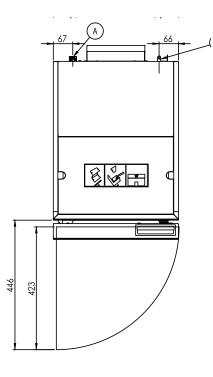

- A Electrical connection
- E Humidity discharge

INCOMING WATER

PH	7.0-8.5	
TDS (fixed residue)	40-150 mg/L)	
Hardness (CaCO3)	3°f - 9°f (30-90 ppm; 1.5-5°d)	
Langelier index	> 0.5	

METAL SALT AND ION CONTENT

CI Chlorides	< 20 mg/L
Sulphates + Nitrates	< 20 mg/L
CI ₂ Chlorine free	< 0.1 mg/L
Chloramines	< 0.5 mg/L
Iron	< 0.1 mg/L
SiO ₂ Total Silica	< 10 mg/L